

R3190

Stainless steel AISI 316L precision pressure regulator



FEATURES

Precision pressure regulator for inlet pressure up to 6 bar (87psi).

Standard version connections G2-F, by flanges screwed to the body. NPT, 1 ½" or flanged connections available on request.

Outlet pressure is controlled by a rubber diaphragm. The main valve is balanced.

Available the ATEX version.

Brand  II2GDcIICX.

For use in potentially atmospheres zones: 1, 21, 2, 22 (not applicable in mines and zone 0).

The product complies with the directive 97/23/CE PED.

SPECIFICATIONS

Weight: ~35 kg (~77 lb)

Standard version operating temperature: -20°C ÷ +60°C (-4°F ÷ 140°F)

Main valve leakage classification: VI

Flow coefficient: Kv= 5.7 Nm³/h (CV = 6,6 US gal/min)

Degree of protection: IP25

G¼ ports for outlet pressure gauge

Adjusting screw to set outlet pressure

MATERIALS

Body and bonnet: stainless steel AISI 316L

Internal parts: stainless steel AISI 316L

Main valve spring: stainless steel AISI 302

Adjusting spring: C85 nickel plated NiP/Fe 15 µm (not in contact with the fluid)

Diaphragm: NBR and PTFE coupled diaphragms (PTFE diaphragm in contact with the fluid)

O-Rings: FPM/(EPDM for CO₂)

Main valve gasket: FPM/(EPDM for CO₂)

ACCESSORIES




Gauges kit: accuracy class 1,6

SPARE PARTS

Gauges

Complete kit: assembled diaphragm, net filter, main valve, O-rings

flow charts

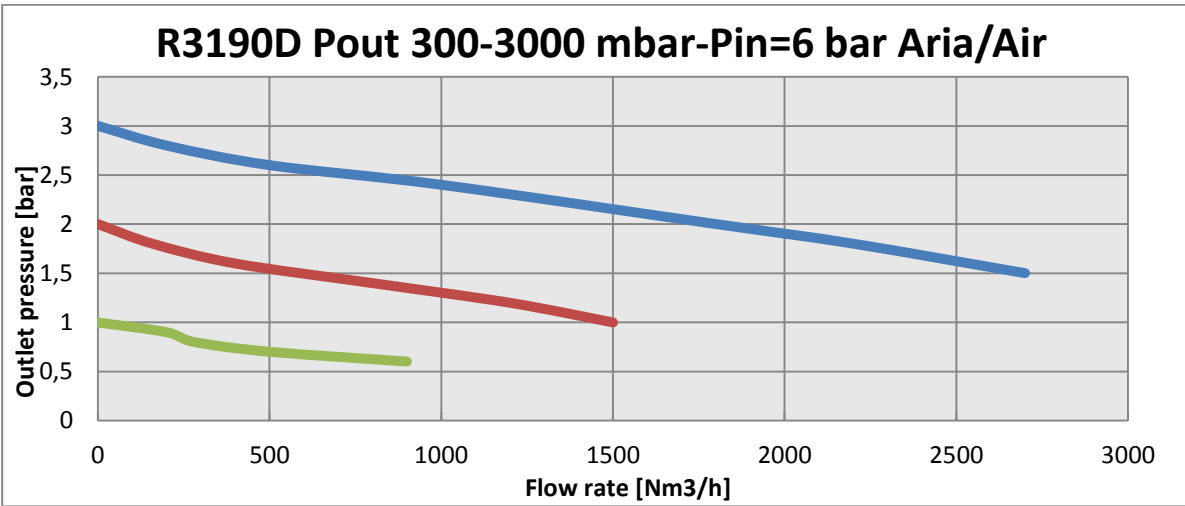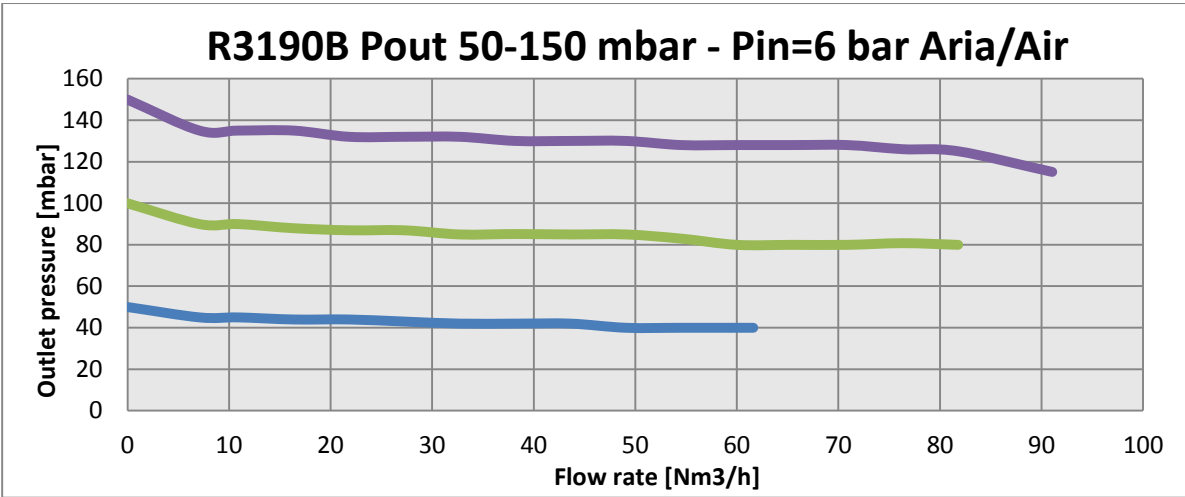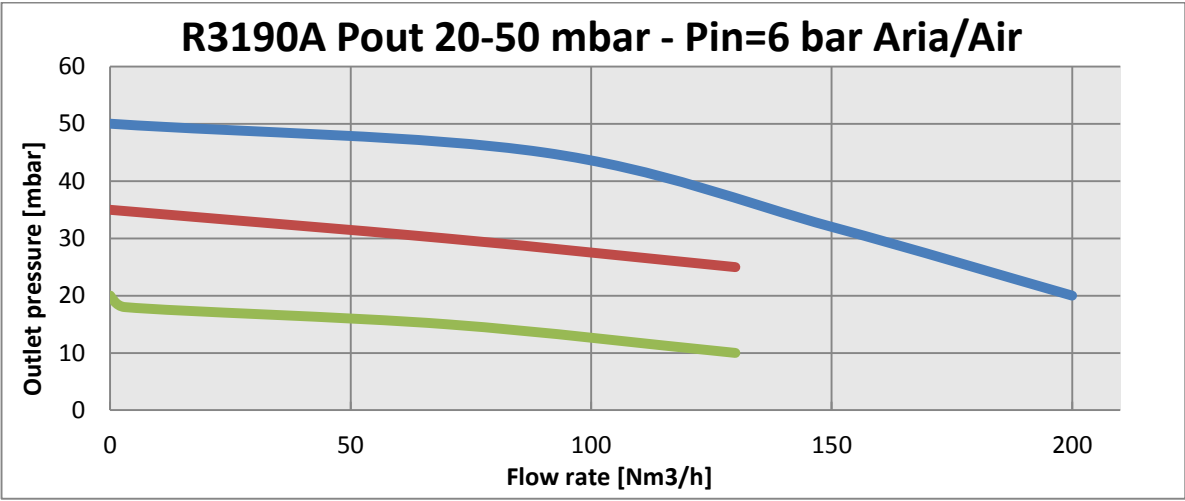

available model types

Regolatori di pressione ad alta sensibilità High sensibility pressure regulators

Campana in acciaio inox 316L / Bonnet of stainless steel 316L

Corpo in acciaio inox 316L / Body of stainless steel 316L

Particolari interni in acciaio inox 316L / Internal parts of stainless steel 316L

TYPE	PS bar	P.Out mbar	CONNECTION IN	CONNECTION OUT	CODE	MEDIUM
						R3190
R 3190 A	6	20-50	G 2-F	G 2-F	3190#TO	O ₂
						*
						**
R 3190 B	6	50-150	G 2-F	G 2-F	3190#TO	O ₂
						*
						**
R 3190 C	6	150-300	G 2-F	G 2-F	3190#TO	O ₂
						*
						**
R 3190 D	6	300-3000	G 2-F	G 2-F	3190#TO	O ₂
						*
						**

* Aria - N₂ - He - Ar - H₂ - C₃H₈ - CH₄

** NH₃ - CO₂ - N₂O

ATTACCHI DIVERSI DA STANDARD / CONNECTION DIFFERENT FROM STANDARD

Attacchi in/out diversi da standard (2" NPT-F - G 1 1/2-F - 1"1/2 NPT-F) / Connections different from standard (2" NPT-F - G

Attacchi flangiati / Connections with flanges

ESECUZIONI DIVERSE DA STANDARD / EXECUTIONS DIFFERENT FROM STANDARD

Pressione uscita pretarata, sopra 0,1 bar / Pre-set outlet pressure for outlet pressure more than 0,1 bar

Pressione uscita tarata fissa, sopra 0,1 bar / Fixed outlet pressure for outlet pressure more than 0,1 bar

O-ring secondo FDA / O-ring according to FDA

O-ring diversi da standard - EPDM / O-ring different from standard - EPDM

Convogliamento su campana / Connection for bonnet piping

Stampigliatura su specifica del cliente / Not standard branding

Versione ATEX / ATEX version

Temperatura diversa da standard / Temperature different from standard

Sgrassato uso O₂ / Degreased for O₂

ACCESSORI / ACCESSORIES

Kit manometro ø 63 e raccordo inox Stainless steel Gauge ø 63 back connection with fitting	R 3190 A	M63304	0+100 mbar 0+1000 mmH ₂ O
	R 3190 B	M63302	0+300 mbar 0+3000 mmH ₂ O
	R 3190 C	M63303	0+1bar
	R 3190 D	M63306	0+6 bar

generating the product code

R3190 aisi316			
AA BB CC DD E FF			
AA	Attacchi / Connections	T0	G 2-F
BB	Pressione ingresso / Inlet pressure	A0	PS 6 bar
CC	Intervallo uscita / Outlet range	B0	MOD D Pout 0,3 - 3 bar
		L0	MOD C Pout 150 - 300 mbar
		R0	MOD A Pout 20 - 50 mbar
		U0	MOD B Pout 50 - 150 mbar
DD	Tipologia di fluido / Fluid type	98	EPDM
		99	FPM
E	Marchiato / Marked	I	ID
		Z	Dir ATEX 94/9 CE
FF	Accessori / Accessories	00	Nessun accessorio

CODE COMPOSITION EXAMPLE

3190#T0 A0 R0 99 I 00

3190#: Regulator R3190 in AISI 316

T0: Connection G2-F

A0: Maximum inlet pressure 6 bar

R0: Outlet pressure range 20 - 50 mbar


99: FPM Gaskets

I

00: No accessories

technical drawings (all dimensions in mm)

MODEL	H	P _{out}	GAUGE KIT	GAUGE
R3190A	~ 431	20 ÷ 50 mbar	M63304	0 ÷ 100 mbar
R3190B	~ 431	50 ÷ 150 mbar	M63302	0 ÷ 300 mbar
R3190C	~ 467	150 ÷ 300 mbar	M63303	0 ÷ 1 bar
R3190D	~ 430	0.3 ÷ 3 bar	M63306	0 ÷ 6 bar

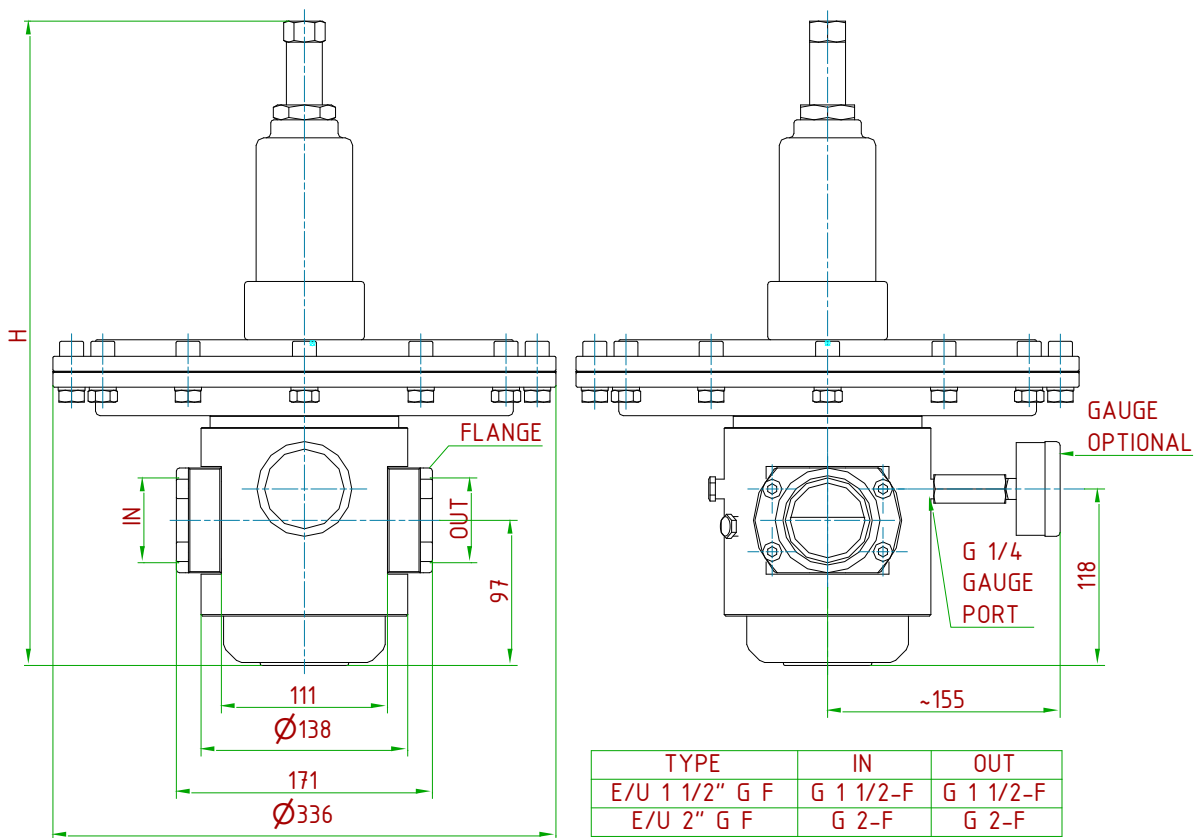

ID Insert Deal Srl

Strada dei Boschi, 40
20852 Villasanta (MB) Italia
tel. +39 039 30 2035
info@idinsertdeal.com
www.idinsertdeal.com

ID Insert Deal si riserva il diritto di cambiare le specifiche del prodotto senza preavviso.
ID Insert Deal reserves the right to change and/or modify product specifications without prior notice.

Insert Deal non si assume alcuna responsabilità per la scelta, uso e manutenzione di qualsiasi prodotto. La responsabilità per l'ideale scelta, uso e manutenzione di qualsiasi prodotto ID rimane interamente a carico dell'acquirente.

Insert Deal does not assume responsibility for selection, use and maintenance of any products. Responsibility for proper selection, use and maintenance of any ID products remains entirely to the purchaser.

Riproduzione vietata. Tutti i diritti riservati; nessuna parte del presente documento può essere riprodotta senza autorizzazione di ID Insert Deal Srl.
Reproduction forbidden. All rights reserved; the hereby document can't be reproduced, also partially, without the authorization of ID Insert Deal Srl.

3^S-3190 - R3190_EN_00



Azienda con sistema di gestione qualità certificato.
certificato N° 50 100 9191
Company with certificated quality management system.
certificate N° 50 100 9191